



E104-BT12LSP-TB



1. Contents

Disclaimer.....	3
1 Introduction.....	4
1.1 Features.....	4
1.2 Electrical parameters.....	4
2 Function brief.....	5
2.1 Pin definition.....	6
2.2 Function test.....	6
2.3 CH340 driver installation.....	6
3 Customized cooperation.....	7
4 About us.....	7

Disclaimer


EBYTE reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of EBYTE is strictly prohibited.

The information contained herein is provided “as is” and EBYTE assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by EBYTE at any time. For most recent documents, visit www.ebyte.com.

E104-BT12LSP-TB User Manual V1.0

1. Introduction

1.1 Features

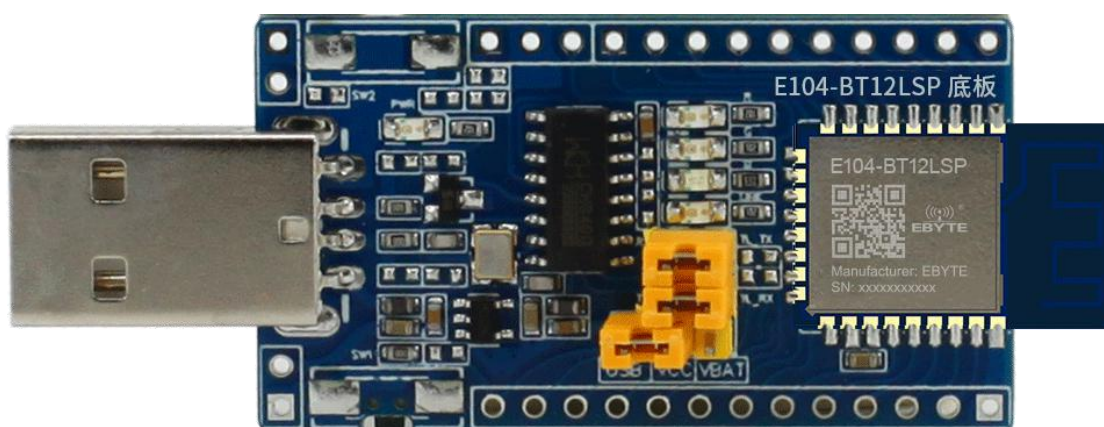

E104-BT12LSP-TB test adopts USB interface, which can be used to quickly test E104-BT12 Bluetooth related features and functions.


1.2 Electrical parameters

No.	parameter name	Parameter value	Annotation
1	Support module	E104-BT12LSP	Mesh Networking module
2	Module size	46.5 * 26 mm	With USB connector
3	Production Process	Lead-free process, machine-mounted	Wireless products must be machine-mounted to ensure batch consistency and reliability
4	Power supply interface	USB	-
5	Communication Interface	TTL	-
6	Operating temperature	-40 ~ +85℃	Industrial grade
7	Working humidity	10% ~ 90%	Relative humidity, non-condensing
8	Storage temperature	-40 ~ +125℃	Industrial grade

2. Function brief

2.1 Pin definition

Pin usage

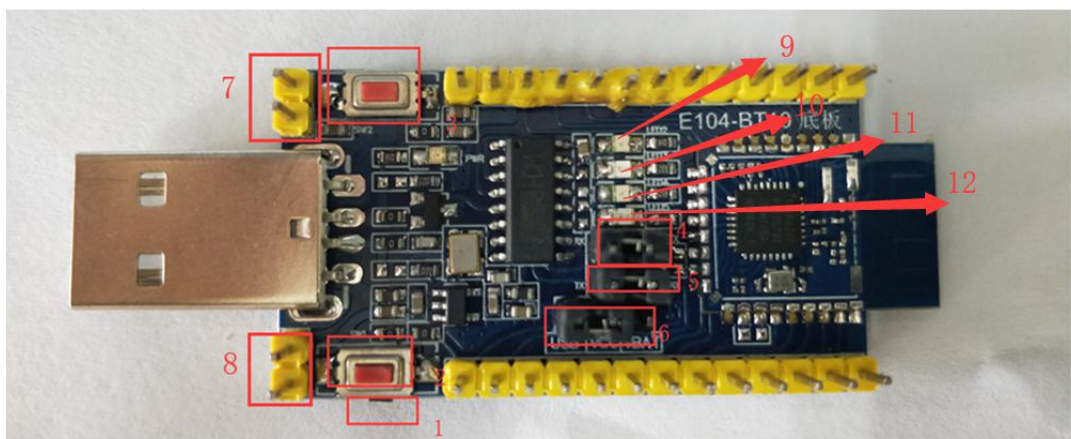

Pin No.	Pin name	Pin direction	Pin usage
1	RST	Input	Module reset button
2	SW1	Input	retain
3	SW2	Input	retain
4	TX	output	Serial output pin
5	RX	Input	Serial input pin
6	VCC	-	The jumper cap selects whether it is USB powered or battery powered
7	BAT	-	Battery power supply pin
8	+5V	-	External power supply pin (not powered by USB)
9	LED_R (PD2)	output	Pwm output
10	LED_G (PC1)	output	Pwm output
11	LED_B(PB5)	output	Pwm output
12	LED_B(PB4)	output	Network indicator

Note: Please refer to the user manual of E104-BT12 for specific function instructions.

2.2 Function test

Test function	Description
Test receiving and transmitting current	Connect the ammeter to the 6th pin, and then measure the sending and receiving current
Data transmission test	Refer to the Quick Start in the E104-BT12LSP datasheet for a series of tests.
Modification of module parameters	Refer to E104-BT12LSP datasheet for parameter configuration, configuration data

2.3 CH340 driver installation

If it is the first time to use the CH340 interface conversion module, the PC will prompt to install the new device driver, which can be searched and downloaded online, or the driver wizard can download the driver

3. Customized cooperation

★If customers need product customization, please contact us.

★Ebyte has reached in-depth cooperation with many well-known companies.



4. About us



EBYTE is a company specializing in providing wireless data transmission solutions and products

- ◆Independently research and develop hundreds of models of products and software;
- ◆Wireless transparent transmission, WiFi, Bluetooth, Zigbee, PKE, digital radio and many other series of wireless products;
- ◆With nearly a hundred employees, tens of thousands of customers, and cumulative sales of millions of products;
- ◆Business covers more than 30 countries and regions around the world;
- ◆Passed the ISO 9001 quality management system and ISO 14001 environmental system certification;
- ◆It has a number of patents and software copyrights, and has passed international FCC/CE/ROHS and other authoritative certifications.

【Phone】 028-61399028

【Tax】 028-64146160

【Website】 www.ebyte.com

【Technology Support】 support@cdebyte.com

【Address】 B5 Mould Park, 199# Xiqu Ave, High-tech District, Sichuan, China